



GenWatch3[®]
GW_CloneWatch
Software Version 2.3
Module Book

GenWatch3[®]

600-2.3.0-J.1
4/7/2011

Trademarks

The following are registered trademarks of Motorola: SmartZone, SmartNet, ASTRO®.

Any other brand or product names are trademarks or registered trademarks of their respective holders.

The Genesis Group Trademark Information

GenWatch3® is a registered trademark of GenCore Candeo, LTD., a subsidiary of Burks Gencore Co., Inc. D.B.A. The Genesis Group and Phil Burks.

Copyright

Copyright © 2011; Burks Gencore Co., Inc. D.B.A. The Genesis Group and Phil Burks. All rights are reserved. No part of this publication or the associated program may be reproduced, transmitted, transcribed, in whole or in part, in any form or by any means, whether it is mechanical, magnetic, optical, electronic, manual or otherwise, without the prior written consent of Burks Gencore Co., Inc. D.B.A:

The Genesis Group and Phil Burks
601 Shelley Dr., Suite 202
Tyler, Texas 75701.

Includes technology licensed from Motorola.

Disclaimer

The GenWatch3 Users Manual is printed in the U.S.A. Burks Gencore Co., Inc. D.B.A. The Genesis Group and Phil Burks believe that the information included in this manual is correct; however, Burks Gencore Co., Inc. D.B.A. The Genesis Group and Phil Burks reserves the right to alter, revise and make periodic changes to the manual and its contents. Burks Gencore Co., Inc. D.B.A. The Genesis Group does not assume responsibility to notify any person of such revisions or changes. While we have taken strides to carefully examine our software and documentation and believe that it is reliable, the Genesis Group and Phil Burks assume no responsibility for the use of the manual, or GenWatch3 software, nor for any patent infringements or other rights of third parties who may use the manual or the GenWatch3 software. Burks Gencore Co., Inc. D.B.A. The Genesis Group and Phil Burks make no representations or warranties with respect to the contents or fitness for a particular purpose beyond the cost of the software paid by the end-user.

The software contains valuable trade secrets and proprietary information. Unauthorized use of the manual or software can result in civil damages and criminal prosecution. As an end user, you agree to abide by and heed these statements.

License

Title to the media on which the program is recorded and to the documentation in support of the product is transferred to you, but title to the program, and all subsequent copies of the program, despite the form or media in or on license is not a sale of the original or any subsequent copy. You assume responsibility for the selection of the program to achieve your intended results, and for the installation, use, and results obtained from the program.

Refer to the GenWatch3 Manual Overview for your full license. All license information contained on pages 4-7 (Book 600-2.3.0-AA.1) are to be considered as contained herein.

Support

Customer satisfaction is our number one priority at Genesis. We are here to provide you with the best software possible, and we want to know when you have any questions, concerns or problems with GenWatch3 so that we can make it a better product for everyone.

Refer to the *Troubleshooting & Support* section of the GenWatch3 Manual Shell (Book 600-2.3.0-AA.1) for complete support and contact information.

Document History

Revision	Description	Author
2.0.2	Initial Release	
2.0.3	Updated Screenshots	CBH
2.0.3	Revision before Release	CBH
2.0.4	Added Exempt Control Detail	KIH
2.0.5	Revision before Release	TDW
2.0.6	Updated screenshots	REB
2.0.6	Updated screenshots	CLB
2.0.6	Added note to Radio Search section	WRK
2.0.6.6	Revision before Release	TDW
2.2	Update settings screenshot	WRK
2.2	Document Reviewed	WRK
2.3	Revisions Before Release	CWF

Table of Contents

<i>Trademarks</i>	3
<i>Trademarks</i>	3
<i>The Genesis Group Trademark Information</i>	3
<i>Copyright</i>	3
<i>Disclaimer</i>	3
<i>License</i>	3
<i>Support</i>	3
DOCUMENT HISTORY	4
TABLE OF CONTENTS	5
ABOUT THIS MANUAL	7
GOALS	7
WHO SHOULD READ THIS MANUAL?	7
HOW THIS MANUAL IS ORGANIZED	7
CHAPTER 1 OVERVIEW	9
WHAT IS GW_CLONEWATCH?.....	9
WHAT IS A SUSPECT?	11
CHAPTER 2 SETTING UP GW_CLONEWATCH	13
RESOURCES & ID RANGES TREE	13
<i>Resource ID Ranges</i>	14
<i>Schedules</i>	14
Managing Schedules	15
Adding a Schedule	15
Editing a Schedule	16
Deleting a Schedule	16
Copying a Schedule	17
MANAGING RESOURCE ID RANGES	18
<i>Resource ID Range Rules</i>	18
<i>Adding Talkgroup ID Ranges</i>	19
<i>Adding Radio ID Ranges</i>	20
Radio Search	22
<i>Editing an ID Range</i>	24
<i>Deleting an ID Range</i>	24
CHAPTER 3 USING GW_CLONEWATCH	25
USING THE SUSPECT LIST	26
<i>Suspect List Options</i>	27
New	27
Delete	27
Exempt	28
* Selective Inhibit	28
* Cancel Selective Inhibit	28
** Radio Check.....	28
Add to Suspect Hot List	29
History	29
Print.....	31
USING THE SUSPECT HOT LIST	32
<i>Suspect Hot List Options</i>	33
Remove	33

History	33
Print.....	33
USING THE SUSPECT EXEMPTION LIST	34
<i>Suspect Exemption List Options</i>	35
Delete	35
Restore	35
History	35
Print.....	36
CHANGING GW_CLONEWATCH SETTINGS	37
<i>Overlap Threshold</i>	37
<i>Impossible Driving Distance (IDD) Threshold</i>	38
Assumed Driving Speed.....	38
Ignored IDD Suspect Threshold.....	38
Average Broadcast Radius	39
The IDD Formula.....	39
IDD Formula Conclusion	40
View Site Map	40
<i>Affiliation Watch</i>	41
<i>Talkgroup Watch</i>	42
<i>Notification Options</i>	43
<i>Suspect Notifications</i>	44

Goals

This manual describes the role and function of the GW_CloneWatch module in the GenWatch3 solution.

Who Should Read This Manual?



This manual is written for the intended audience of novice to mid-level trunked radio system users and novice to mid-level PC users.

How This Manual Is Organized

This manual is organized as follows:

- **Overview:** Describes the GW_CloneWatch module and provides a brief overview of its function.
- **Setting up GW_CloneWatch:** Describes how to set up GW_CloneWatch Resource ID Ranges and Schedules.
- **Using GW_CloneWatch:** This chapter describes how to use GW_CloneWatch to monitor suspect activities.

This manual contains the following images, used to indicate that a segment of text requires special attention:

-  **Additional Information:** Additional information is used to indicate shortcuts or tips.
-  **Warning:** Warnings are used to indicate possible problem areas, such as a risk of data loss, or incorrect/unexpected functionality.

This chapter describes the GW_CloneWatch module and provides a brief overview of its function.

This chapter contains the following sections:

- **What is GW_CloneWatch?:** Defines the GW_CloneWatch module and GUI (Graphical User Interface).
- **What is a Suspect?:** Describes how GW_CloneWatch identifies suspects.

What is GW_CloneWatch?

The GW_CloneWatch module monitors resources (groups and radios) for suspicious activity. Suspect resources are added to a list where the suspect's activities are then displayed and recorded in detail.

When an activity (push-to-talk, affiliation, etc.) is received on a group or radio ID (also known as resources), this activity is validated against the Resource Ranges defined within the GW_CloneWatch GUI. If the activity of the resource violates the expected activity definitions, the resource is added to the **Suspect List**. Once in the **Suspect List**, the resource's activity is closely monitored and detailed in the GW_CloneWatch database.

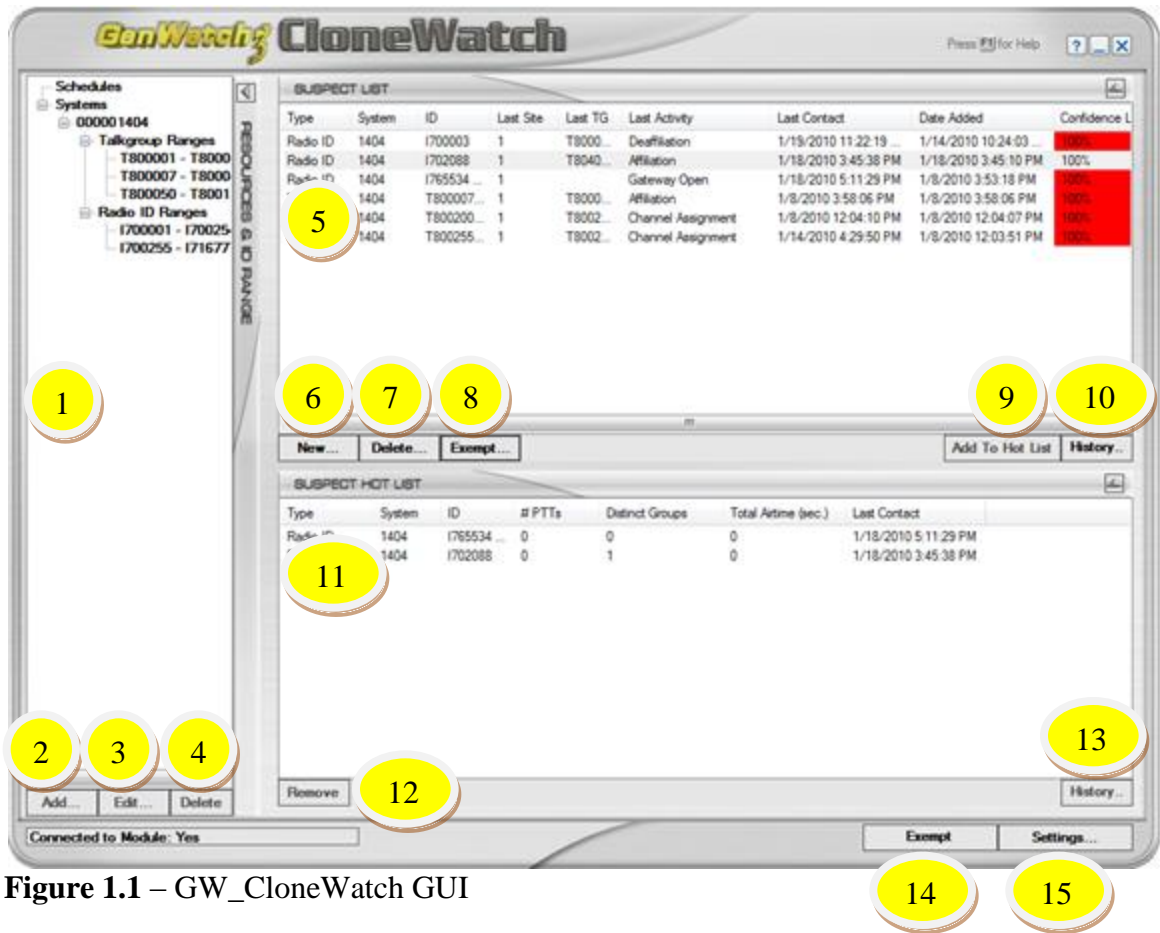


Figure 1.1 – GW_CloneWatch GUI

1. **Resource Tree:** This tree includes the schedules, systems, radio IDs and groups monitored by GW_CloneWatch.
2. **Add:** Allows you to add a new resource.
3. **Edit:** Allows you to edit the selected resource.
4. **Delete:** Allows you to delete the selected resource.
5. **Suspect List:** List of current GW_CloneWatch suspects.
6. **New:** Allows you to manually add a new suspect.
7. **Delete:** Allows you to delete one or more selected suspects.
8. **Exempt:** Allows you to move one or more selected suspects to the **Suspect Exemption List**.
9. **Add to Hot List:** Allows you to move one or more selected suspects to the **Suspect Hot List**.
10. **History:** Allows you to view the recent activity of a selected suspect in the **Suspect List**.
11. **Suspect Hot List:** Suspects that are being watched closely.
12. **Remove:** Removes a suspect from the **Suspect Hot List**.
13. **History:** Allows you to view the recent activity of a selected suspect in the **Suspect Hot List**.
14. **Exempt:** Shows the **Suspect Exemption List**.
15. **Settings...:** Shows the settings window for GW_CloneWatch.

What is a Suspect?

A suspect is a resource (radio ID or group) that breaks a predefined rule of expected behavior. The following rules are enforced within GW_CloneWatch:

- **Usage outside of the predefined schedule of usage:** This rule is applied when you set up a GW_CloneWatch schedule (described in Chapter 2) and assign that schedule to a radio ID. If usage is detected outside of the schedule, GW_CloneWatch adds the radio ID to the **Suspect List** with a confidence level of 100%.
- **Usage of a resource that is in an unassigned or unallocated resource range:** This rule is applied when you assign a validity level of Unassigned or Unallocated to resource range (described in Chapter 2). If usage is detected on one of these resources then GW_CloneWatch adds the resource to the **Suspect List** with a confidence level of 100%.
- **Usage of a service that is not selected when services are restricted:** This rule is applied to radio ID resource ranges when you select the **Allow Only the Following Services** option (described in Chapter 2). Services are radio features such as dispatch, private, status, message, etc. GW_CloneWatch validates each activity that is detected for radio IDs in this range against the selected services. If a radio ID in the range uses a service outside of the selected services, then GW_CloneWatch adds this radio ID to the Suspect List with a confidence level of 100%.
- **Overlapping calls:** This rule is applied to conversations that occur on radio IDs. If a conversation for a radio ID on a given group overlaps with a conversation for the same radio ID on a different group, GW_CloneWatch adds the radio ID to the suspect list. If there is a partial overlap, the confidence level is 75%. If there is a full overlap, the confidence level is 100%. This rule ignores patch, multiselect, and multigroup calls.
- **Impossible Driving Distance (IDD) activity:** This rule is applied only to multi-site data and requires latitudinal and longitudinal coordinates set up in the GW_Alias screen for each site on the system(s) monitored by GenWatch3. Each time the source site for a radio ID changes, this rule looks at the current activity time and the last activity time. If the time it took the radio ID to travel between sites is above the defined IDD threshold, GW_CloneWatch adds the radio ID involved in the activity to the **Suspect List**.
- **Rapid Affiliation:** This rule is applied when a radio issues an affiliation activity (usually when a radio is turned on), switches groups or responds to a dispatcher issuing a radio check. Each system has an expected number of affiliations received from a radio for these events. If more than that number of affiliations is received, there may be two radios with the same ID.

This chapter describes how to set up GW_CloneWatch Resource ID Ranges and Schedules.

This chapter contains the following sections:

- **Resources & ID Ranges Tree:** Describes the **Resources & ID Ranges** tree.
- **Managing Schedules:** Describes how to create and manage **Schedules**.
- **Managing Resource ID Ranges:** Describes how to manage Resource ID Ranges.

Resources & ID Ranges Tree

The **Resource & ID Ranges** tree contains each Schedule and Resource ID Range that you define within the GW_CloneWatch GUI. The ID ranges are organized by System and even further by Resource ID Range Type (radio ID or talkgroup). Using the **Resource & ID Range** tree, you can easily add, edit, delete or view Schedules and Resource ID Ranges.

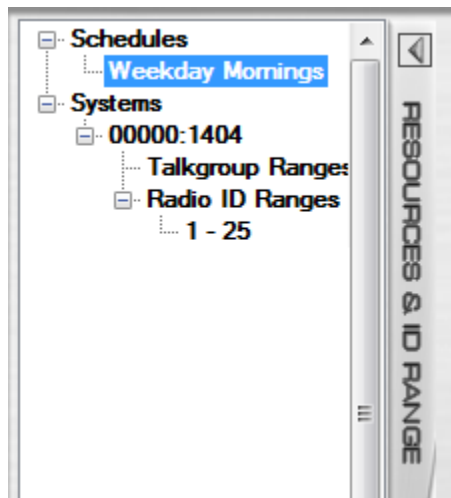


Figure 2.1 – Resource ID Ranges Tree



Resource ID Range: A range of groups or radio IDs, such as radio IDs 1 through 4.

Resource ID Ranges

A Resource ID Range is a number range of IDs that share the same set of GW_CloneWatch rules. A common example is even group IDs. Many systems only allow usage on odd numbered group IDs. For these systems, when activity is detected on an even numbered group, the activity is the result of a rogue user or incorrect programming. To monitor activity on even numbered group IDs with GW_CloneWatch, you need only set up one Resource ID Range for all even group IDs in the range 2-65534. This ID range will be 'Unallocated' (meaning that they are not provisioned on the system) or 'Unassigned' (meaning that they are provisioned on the system, but not for use).

Schedules

GW_CloneWatch Schedules are weekly plans of expected (allowed) usage for a radio ID on the system. Once you create a Schedule, you can apply the Schedule to any **Radio ID Range** that you wish to restrict to this schedule. Any radio ID that violates its Schedule is reported as a Suspect within the GW_CloneWatch **Suspect List**.

Some common examples of Schedules are day shift and night shift, where day shift is from 6:00 AM to 6:00 PM and night shift is from 6:00 PM to 6:00 AM.

Managing Schedules

You can add, update, delete and copy schedules using the buttons below the **Resources & ID Ranges** tree or by right-clicking on the root Schedules node or a Schedule node below the root Schedules node. Schedules are displayed and edited within the *Add/Edit Schedule* window show below in Figure 2.2.

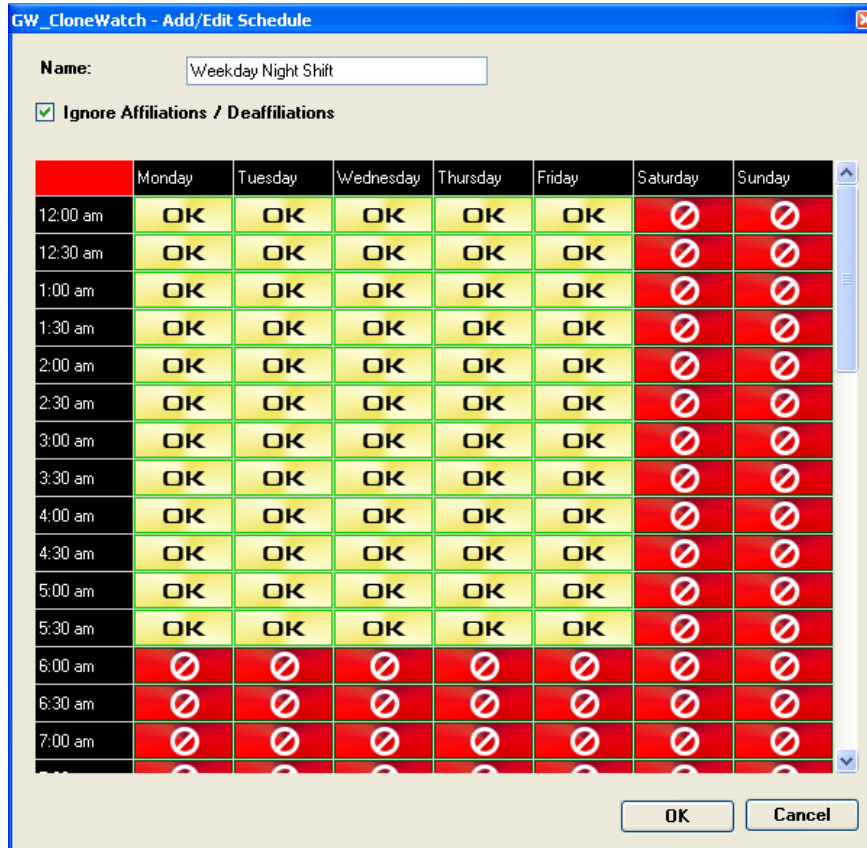


Figure 2.2 – Add/Edit Schedule Window

Adding a Schedule

To add a new Schedule, take the following steps:

1. Click the root Schedules node in the **Resources & ID Ranges** tree: This will enable the **Add...** button below the **Resources & ID Ranges** tree if it is not already enabled.




Figure 2.3 – Root Schedules Node

2. Click the **Add...** button below the **Resources & ID Ranges** tree (Figure 1.1, item 2), or right-click the Schedules node and choose **Add a New Schedule...** from the menu. Either of these actions will load the *Add/Edit Schedules* window.

3. Type a name in the **Name** text box to describe the Schedule. This name should describe the schedule, such as “Night Shift,” “Day Shift,” etc.
4. Choose to ignore Affiliations/Deaffiliations that occur outside of the scheduled times by checking the **Ignore Affiliations/Deaffiliations** checkbox.
5. In the date and time grid, select each 30-minute period that the unit is allowed usage on. To select a 30-minute period, double click on the period (cell). To select an entire day, double-click on the day (top of each column). To select a 30-minute period across all days, double-click the time (left-most column). To clear all selected periods, double-click on the upper-left cell of the grid.
6. When you are finished selecting time periods, click the **OK** button: This will close the *Add/Edit Schedules* window and return you to the GW_CloneWatch main screen. Notice that your new Schedule now appears in the **Resources & ID Ranges** tree.

Editing a Schedule

To edit an existing Schedule, take the following steps:

1. In the **Resources & ID Ranges** tree, select the Schedule that you wish to edit: This will enable the **Edit...** button if it is not already enabled.
2. Click the **Edit...** button (Figure 1.1, item 3) or, you can right-click on the Schedule in the **Resources & ID Ranges** tree and choose **Edit...** from the resulting menu: This will load the *Add/Edit Schedule* window.
3. Make the desired changes to the Schedule.
4. Press the **OK** button to save your changes, or press the **Cancel** button to abort the changes: Either of these actions will return you to the GW_CloneWatch GUI.

Deleting a Schedule

To delete a Schedule, take the following steps:

1. In the **Resources & ID Ranges** tree, select the Schedule that you wish to delete: This will enable the **Delete...** button if it is not already enabled.
2. Click the **Delete...** button or, you can right-click on the Schedule in the **Resources & ID Ranges** tree and choose **Delete...** from the resulting menu. This will result in a confirmation window.
3. Choose **Yes** to delete the selected Schedule: Any Resource ID ranges that reference the deleted Schedule will no longer be restricted to a time range.

Copying a Schedule

Sometimes you may want to create a new Schedule that is similar to an existing Schedule. The **Copy** function is made to help save time in this process. To copy an existing Schedule, take the following steps:

1. In the **Resources & ID Ranges** tree, select the Schedule that you wish to copy.
2. Right-click on the selected Schedule: This will result in a menu of options.
3. Click the **Copy** option from the menu: This will create a copy of the selected Schedule. You will now see a Schedule in the **Resources & ID Ranges** tree with the text '(1)'. This Schedule is the resulting copy of the selected Schedule.
4. Edit the newly copied Schedule (See *Editing a Schedule* above).

Managing Resource ID Ranges

Resource ID Range Rules

Below is a list of rules regarding Resource ID Ranges:

- ID values cannot overlap within a Resource ID Range Type: For example, you cannot have a range of groups from 2 through 10 and a range of groups from 5 through 21. An exception to this is if the range from 2 through 10 contains even numbers only and the range from 5 to 21 contains odd numbers only. In this case the ranges do not truly overlap, because they do not share a number within the ranges. GW_CloneWatch will not allow you to create overlapping Resource ID Ranges.
- Odd number ranges must begin and end with odd numbers, and even number ranges must begin and end with even numbers.

Adding Talkgroup ID Ranges

To add a Talkgroup ID Range, take the following steps:

1. In the **Resources & ID Ranges** tree, click on the **Talkgroup Ranges** entry that you wish to add a Talkgroup ID Range to: This will enable the **Add...** button below the **Resources & ID Ranges** tree.
2. Click the **Add** button under the **Resources & ID Ranges** tree: This will load the *Add / Edit ID Range* window. (shown in Figure 2.2). The **System ID** and **Type** values are provided based on the **Resources & ID Ranges** tree entry that you had selected when you pressed the **Add...** button. These values cannot be changed.
3. Enter the Talkgroup ID range. Follow the rules in the *Resource ID Range Rules* section previously defined in this chapter. Remember to choose **Odd Only** or **Even Only** if either option applies. If neither is chosen, then all numbers in the range will be included.
4. Choose a Validity Level: Below is a definition for each option:
 - **Assigned:** IDs in this range are assigned to users and activity on these IDs is expected.
 - **Unassigned:** IDs in this range are provisioned on the Central Controller. However, these IDs are not assigned to anyone and should not receive activity.
 - **Unallocated:** IDs in this range are not provisioned on the Central Controller and should not receive activity.

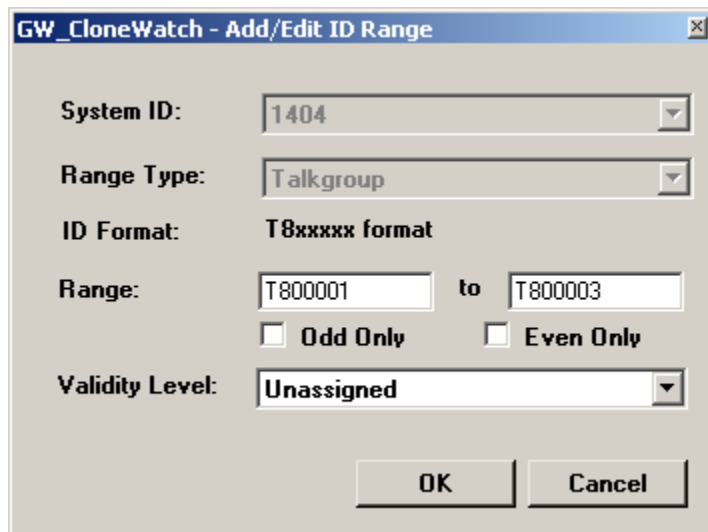


Figure 2.2 – Add / Edit Talkgroup ID Range Window

5. Once you are satisfied with the options for this ID Range, click the **OK** button: This will close the *Add / Edit ID Range* window and return you to the *GW_CloneWatch* GUI. Notice that your new Talkgroup ID Range is now in the **Resource's & ID Range** tree.

Adding Radio ID Ranges

To add a Radio ID Range, take the following steps:

1. In the **Resources & ID Ranges** tree, click on the **ID Ranges** entry that you wish to add a Radio ID Range to: This will enable the **Add...** button below the **Resources & ID Ranges** tree.
2. Click the **Add...** button under the **Resources & ID Ranges** tree: This will load the *Add / Edit ID Range* window. (Shown in Figure 2.3 below). The System ID and Type values are provided based on the **Resources & ID Ranges** tree entry that you had selected when you pressed the **Add...** button. These values cannot be changed.

GW_CloneWatch - Add/Edit ID Range

WACN ID: 00000

System ID: 1404

Range Type: Radio ID

ID Format: Numeric format

Range: 1700001 to 1700019

Odd Only Even Only

Validity Level: Assigned

Console

Restricted To Time Range

Schedule: -None-

Allow Only the Following Services

- Group
- Private
- Interconnect
- Emergency Alarm
- Status
- Message
- Call Alert
- Coded Call
- Clear Call
- Digital Call

Radio Search... OK Cancel

Figure 2.3 – Add / Edit ID Range Window

3. Enter the ID range. Follow the rules in the *Resource ID Range Rules* section previously defined in this chapter. Remember to choose **Odd**

Only or **Even Only** if either option applies. If neither is chosen, then all numbers in the range will be included.

4. Choose a Validity Level: Below is a definition for each option:
 - **Assigned:** IDs in this range are assigned to users and activity on these IDs is expected.
 - **Unassigned:** IDs in this range are provisioned on the Central Controller. However, these IDs are not assigned to anyone and should not receive activity.
 - **Unallocated:** IDs in this range are not provisioned on the Central Controller and should not receive activity.
5. If this range contains consoles, check the **Console** option. Consoles can break the rules of normal behavior and result in a lot of false suspects. This option will ignore the behavior of radio IDs in this range.
6. Optionally restrict the ID range to a specific time range by checking the **Restricted to Time Range** option: This option is only available if the ID Range has a Validity Level of **Assigned** selected. Checking the **Restricted to Time Range** option enables the **Schedule** combo box. Choose a Schedule from the combo box.
7. Optionally restrict the services for this Radio ID range by checking the **Allow Only the Following Services** option: This option is only available if the ID Range has a Validity Level of **Assigned** selected. Checking the **Allow Only the Following Services** option enables the **Services** list box (below the check box). Select (double-click) the services that the Radio ID Range is expected to use. GW_CloneWatch will consider a radio ID in this range suspect if it uses a service that is not selected in this list.
8. If you wish to setup Radio Search on this Radio ID Range, click the **Radio Search...** button.
9. Once you are satisfied with the options for this ID Range, click the **OK** button: This will close the *Add / Edit ID Range* window and return you to the GW_CloneWatch GUI. Notice that your new Radio ID Range is now in the **Resource's & ID Range** tree.



The Dispatch service includes the following radio activities:

- **Affiliations:** If the radio affiliates to a group.
- **Busies:** If the radio receives a busy on a group.
- **Channel Assignments:** If the radio issues a group-based call.

Radio Search

On each Radio ID Range, you can enable the Radio Search option. Radio Search slowly sends a Radio Check command over your control channel for each radio ID in the Radio ID Range.

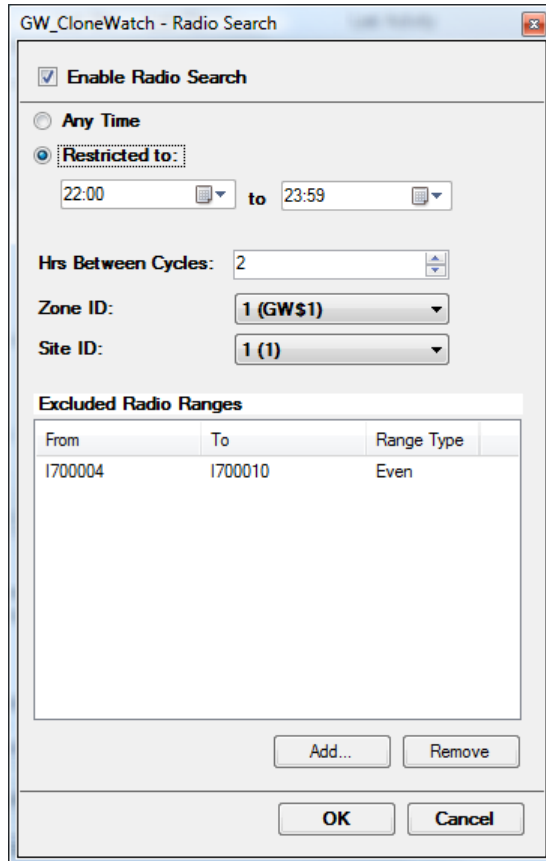





Figure 2.4 – Radio Search Options Window

 In order to use Radio Search, you must be licensed for *RadioSearch* under the GW_CloneWatch module and *RadioCheck* under the GW_Halcyon module.

 You can monitor the progress of these Radio Search commands via the RCM Command window. The commands are archived in the Halcyon database and are available for reporting.

 By specifying unallocated or unassigned Radio ID Ranges, you may use this feature to detect suspect radios operating on your system.

The following options are available on the *Radio Search* options screen:

- **Enable Radio Search:** Enables radio search on this Radio ID Range.
- **Time of day restriction:** Allows you to restrict when radio searching occurs. This allows you to prevent radio search during peak hours.
 - **Any Time:** Perform radio search any time of day.
 - **Restricted to:** Restrict radio search to a time between the two specified times of day.
- **Hrs Between Cycles:** Provides a minimum rest time between when the last radio search is performed on this Radio ID Range and when radio search for this Radio ID Range restarts.
- **Zone Id:** Zone Id targeted in this search.
- **Site Id:** Site Id targeted in this search.
- **Excluded Radio Id Ranges:** Ranges within the Radio ID Range that are excluded from the search.
 - **Add:** Add range to exclude from the radio search. This button loads the *Add Excluded Radio Search Range* window.
 - **Remove:** Remove all selected ranges from the radio search.
- **OK:** Close *Radio Search* window and save changes.
- **Cancel:** Close *Radio Search* window and cancel changes.

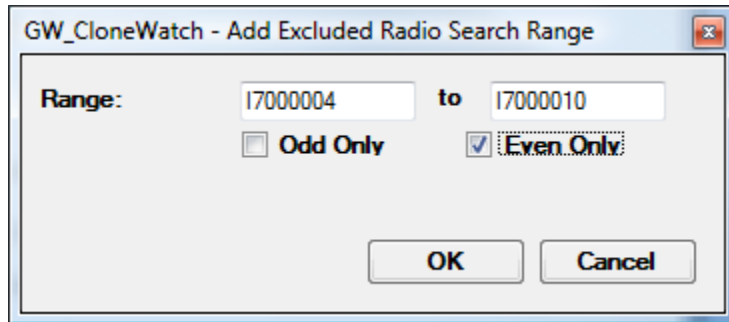


Figure 2.5 – Add Excluded Radio Search Range window

Editing an ID Range

To edit an ID Range (Talkgroup and Radio ID ranges) take the following steps:

1. In the **Resources & ID Ranges** tree, select the ID Range that you wish to edit: This will enable the **Edit...** button.
2. Click the **Edit...** button: This will load the *Add / Edit ID Range* window.
3. Change the options that you wish to change.
4. Once you are satisfied with the changes, click the **OK** button: This will save the changes, close the *Add / Edit ID Range* window and return to the GW_CloneWatch GUI.

Deleting an ID Range

To delete an ID Range (Talkgroup and Radio ID ranges) take the following steps:

1. In the **Resources & ID Ranges** tree, select the ID Range that you wish to delete: This will enable the **Delete** button.
2. Click the **Delete** button: This will result in a confirmation dialog box.
3. Click the **Yes** button to delete the selected ID Range: This will remove the ID range from the **Resources & ID Ranges** tree.

This chapter describes how to use GW_CloneWatch to monitor suspect activities.

This chapter contains the following sections:

- **Using the Suspect List:** Describes how to view and manipulate the Suspect List.
- **Using the Suspect Hot List:** Describes how to view and manipulate the Suspect Hot List.
- **Using the Exempt Suspect List:** Describes how to view and manipulate the Exempt Suspect List.
- **Changing GW_CloneWatch Settings:** Describes the GW_CloneWatch settings.
- **Suspect Notifications:** Describes user notifications of suspect activity.



GW_CloneWatch contains many lists, like the one in Figure 3.1 below. Eliminate list columns that you do not wish to see by decreasing the column size to a 0 width. To decrease a column size:


1. Move the mouse over the right-most edge of the column's header: This will show the I-bar icon.
2. Click the left mouse button and move the mouse to the left until the column is invisible.

GW_CloneWatch saves the current column widths for all lists whenever it is closed and restores the column widths whenever it is opened.

Using the Suspect List

The **Suspect List** contains each suspect that has been added due to suspicious activity and suspects that you have added manually. The **Suspect List** contains the following information about each suspect in the list:

- **Type:** The type of suspect ID. This will either be Talkgroup or Radio ID.
- **System:** The system ID of the suspect
- **ID:** The ID of the suspect. Its alias is shown in parentheses if it is not the default GW\$ alias.
- **Last Site:** The last site on which the suspect reported activity.
- **Last TG:** The last Talkgroup on which the suspect reported activity. Its alias is shown in parentheses if it is not the default GW\$ alias.
- **Last Activity:** The last activity reported for the suspect.
- **Last Contact:** The last date and time the suspect reported activity.
- **Date Added:** The date and time the suspect was added to the **Suspect List**.
- **Confidence Level:** Number indicating how sure GW_CloneWatch is that this is a suspect. The higher this number is, the more confident GW_CloneWatch is that this is a suspicious ID.

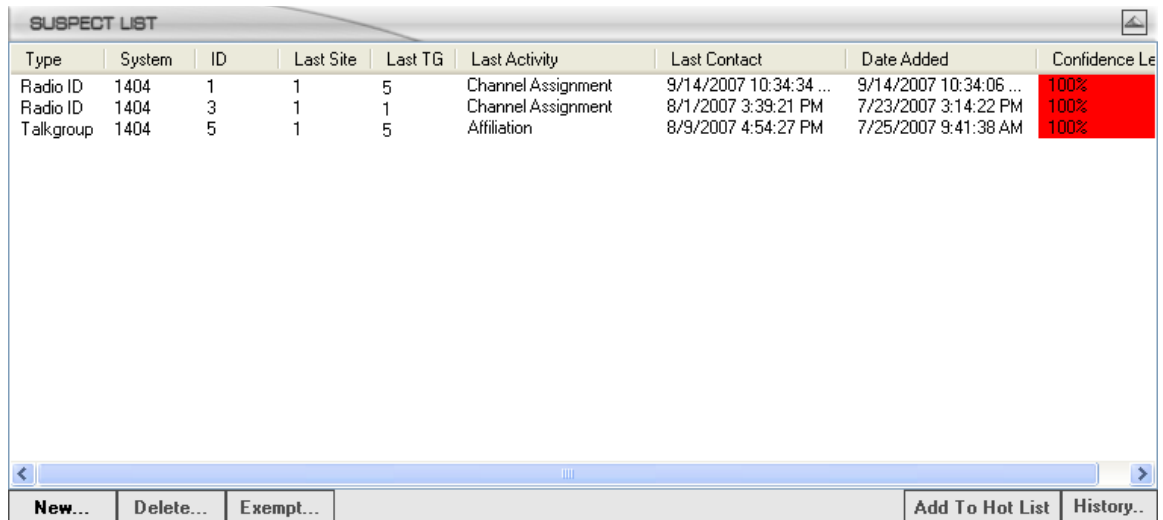

Type	System	ID	Last Site	Last TG	Last Activity	Last Contact	Date Added	Confidence Level
Radio ID	1404	1	1	5	Channel Assignment	9/14/2007 10:34:34 ...	9/14/2007 10:34:06 ...	100%
Radio ID	1404	3	1	1	Channel Assignment	8/1/2007 3:39:21 PM	7/23/2007 3:14:22 PM	100%
Talkgroup	1404	5	1	5	Affiliation	8/9/2007 4:54:27 PM	7/25/2007 9:41:38 AM	100%

Figure 3.1 – GW_CloneWatch Suspect List



It is possible to receive suspect activity on a radio ID or a group that does not exist in your GW_Alias database. You may see a value in the **ID** or **Last TG** columns with a (*NOT FOUND*) next to the radio ID or group. This means that the radio ID or group does not exist in the GW_Alias database.

Suspect List Options

New

The **New** button (Figure 1.1, item 6) allows you to manually add a suspect to the **Suspect List**. You may want to add a suspect if you know a radio ID or group ID is being abused, but you have not yet seen activity on it. Once the suspect has been added, GW_CloneWatch will begin to keep a detailed history of the activity reported on the suspect ID. To manually add a suspect, take the following steps:

1. Click the **New...** button below the **Suspect List**: This will load the *Add Suspect* screen (shown in figure 3.2, below).

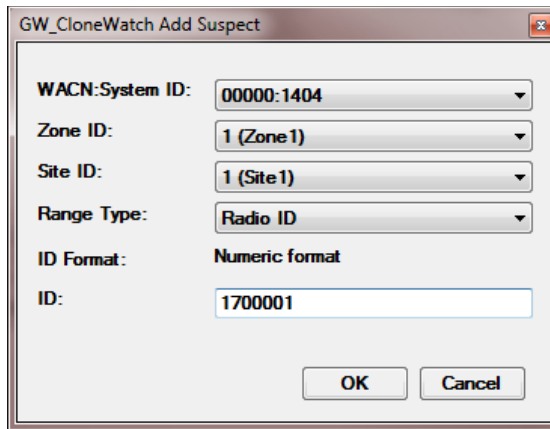


Figure 3.2 – Add Suspect Screen

2. Choose the **System ID**.
3. Choose a **Zone ID**.
4. Choose a **Site ID**.
5. Choose the Range Type. These values include:
 - *Radio ID*
 - *Talkgroup*
6. Type the **ID**.
7. Click the **OK** button to add the suspect: This will close the *Add Suspect* screen, and return you to the GW_CloneWatch GUI.

Delete

The **Delete** button allows you to delete a suspect from the **Suspect List**. You may wish to delete a suspect that was manually added or a suspect that has not received activity in a while. To delete a suspect from the **Suspect List**, take the following steps:

1. Select the suspect that you wish to delete from the **Suspect List**: You can select the suspect by clicking on it.
2. Click the **Delete** button: This will result in a confirmation dialog box.
3. Click the **Yes** button to delete the suspect: This will remove the suspect from the **Suspect List** and delete any history related to the suspect.

Exempt

The **Exempt** button allows you to move a suspect from the **Suspect List** to the **Suspect Exempt List**. You may want to mark a suspect as ‘exempt’ if the suspect exhibits behaviors that result in false suspicious activity. To exempt a suspect from the **Suspect List**, take the following steps:

1. Select the suspect that you wish to exempt from the **Suspect List**: You can select the suspect by clicking on it.
2. Click the **Exempt** button. A confirmation dialog will be displayed for each selected suspect.
3. Click **Yes** to exempt the suspect, **No** to skip to the next suspect, or **Cancel** to abort all remaining exemptions.

*** Selective Inhibit**

Sends a Selective Inhibit command to GW_Halcyon, targeting the selected radio. This will disable the radio until the Selective Inhibit command is canceled, either in GW_CloneWatch or GW_RCM. GW_Halcyon will notify GW_CloneWatch of a simple success or failure. To monitor the progress of the command, load GW_RCM and check the *Command* window.

*** Cancel Selective Inhibit**

Sends a Cancel Selective Inhibit command to GW_Halcyon, targeting the selected radio. This will enable the radio if it is currently inhibited. GW_Halcyon will notify GW_CloneWatch of a simple success or failure. To monitor the progress of the command, load GW_RCM and check the *Command* window.

**** Radio Check**

Sends a Request Radio Affiliation command to GW_Halcyon, targeting the selected radio. This will prompt the radio to issue an affiliation. GW_Halcyon will notify GW_CloneWatch of a simple success or failure. To monitor the progress of the command, load GW_RCM and check the *Command* window.

* - You will only have access to this option if your user’s role has the *SelectiveInhibit* privilege and if you are licensed for Radio Inhibit under GW_Halcyon.

** - You will only have access to this option if your user’s role has the *Radio Check* privilege and if you are licensed for RadioCheck under GW_Halcyon.

Add to Suspect Hot List


The **Suspect Hot List** is a list of suspects, taken from the **Suspect List**, which you would like to monitor more closely. The **Suspect Hot List**, described below in the **Suspect Hot List** section, provides additional tracking information for suspects. To add a suspect to the **Suspect Hot List**, take the following steps:

1. Select the suspect you wish to add to the **Suspect Hot List**: You can select the suspect by clicking on it in the suspect list.
2. Click the **Add to Hot List** button: This will add the suspect to the **Suspect Hot List**.

History

GW_CloneWatch keeps detailed activity information for each suspect in the **Suspect List**. This information is called History. To view the history for a suspect in the **Suspect List**, take the following steps:

1. Select the suspect for which you wish to view history: You can select the suspect by clicking on it.
2. Click the **History...** button: This will load the *Suspect History* window (shown below in Figure 3.3).

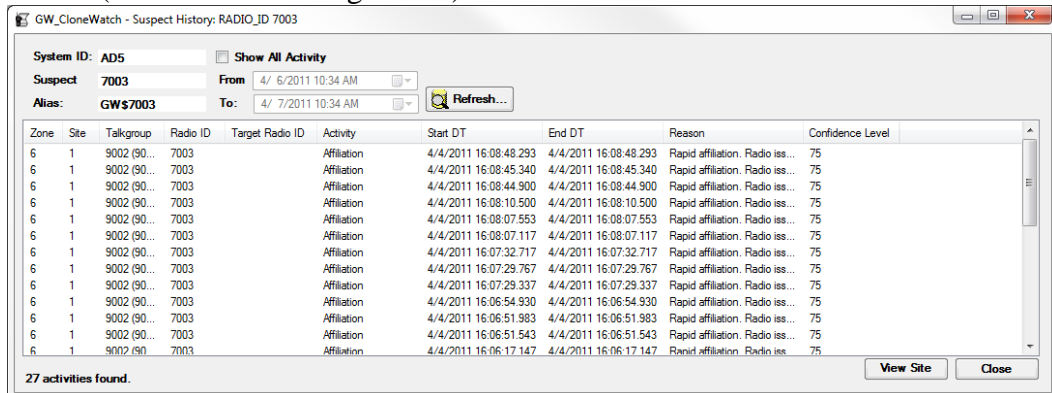

Zone	Site	Talkgroup	Radio ID	Target Radio ID	Activity	Start DT	End DT	Reason	Confidence Level
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:08:48.293	4/4/2011 16:08:48.293	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:08:45.340	4/4/2011 16:08:45.340	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:08:44.900	4/4/2011 16:08:44.900	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:08:10.500	4/4/2011 16:08:10.500	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:08:07.553	4/4/2011 16:08:07.553	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:08:07.117	4/4/2011 16:08:07.117	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:07:32.717	4/4/2011 16:07:32.717	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:07:29.767	4/4/2011 16:07:29.767	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:07:29.337	4/4/2011 16:07:29.337	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:06:54.930	4/4/2011 16:06:54.930	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:06:51.983	4/4/2011 16:06:51.983	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:06:51.543	4/4/2011 16:06:51.543	Rapid affiliation. Radio iss...	75
6	1	9002 (90...	7003		Affiliation	4/4/2011 16:06:17.147	4/4/2011 16:06:17.147	Rapid affiliation. Radio iss...	75

Figure 3.3 – Suspect History Window

3. Press the **Close** button on the *Suspect History* window to return to the GW_CloneWatch GUI.

The *Suspect History List* contains the following columns:

- **Zone:** The zone on which the activity was reported.
- **Site:** The site on which the activity was reported.
- **Source:** The source site on which the activity was reported (ATIA only).
- **Talkgroup:** The group on which the activity was reported. Its alias is shown in parentheses if it is not the default GW\$ alias.
- **Radio ID:** The radio ID on which the activity was reported. Its alias is shown in parentheses if it is not the default GW\$ alias.
- **Target Radio ID:** The target radio ID involved in the activity (if any). Its alias is shown in parentheses if it is not the default GW\$ alias.
- **Activity:** Description of the activity.
- **Start DT:** Date and time the activity started.
- **End DT:** Date and time the activity ended.
- **Reason:** The reasons this activity was deemed as suspect (if any).
- **Confidence Level:** The percent confidence that GW_CloneWatch has that this is suspect activity (if a reason is provided).



GenWatch3 stores the last 30 days of suspect activity for each suspect. Suspect history is purged via the centralized GenWatch3 purging operation. This length of time can be adjusted with the help of GenWatch3 support personnel.



It is possible to receive suspect activity on a radio ID or a talkgroup that does not exist in your GW_Alias database. You may see a value in the **Talkgroup**, **Radio ID** or **Target Radio ID** columns with a (*NOT FOUND*) next to the talkgroup, radio ID or target radio ID. This means that the talkgroup, radio ID or target radio does not exist in the GW_Alias database.

By default the *Suspect History* window will show only suspect activities with suspect reasons (i.e. activities that would result in the resource to be added to the Suspect List). From the *Suspect History* window you can also view detailed activity. To view the detailed activity for a suspect, take the following steps:

1. Load the *Suspect History* window: This will show the suspect activities for the selected suspect.
2. Click the **Show All Activity** checkbox.
3. Choose your **From** date/time and **To** date/time (these will default to:
 - a. 24 hours ago for the **From** value
 - b. Now for the **To** value
4. Press the Enter key or click on the **Refresh** button: This will query the database for all activities for this suspect within the given **From** and **To** date/time values.

Print


GW_CloneWatch allows you to print the activity in its **Suspect List**. To print the **Suspect List**, take the following steps:

1. Select the activity in the Suspect List that you wish to print. Select a range by clicking on the first activity and holding Shift while clicking on the last activity in the desired range. If you wish to print all of the activity in the **Suspect List**, skip this step.
2. Right-click on the **Suspect List**: This will show the activity list options.
3. Click on the **Print ...** option: This will show the printer options screen specific to your default printer.
4. Select the options for your printer. It is usually best to choose to print in landscape mode (not portrait).
5. Click **OK** once you are satisfied with your printer options: This will result in a dialog asking if you want to print the selected items or all items.

Using the Suspect Hot List

The **Suspect Hot List** contains each suspect that has been manually added from the **Suspect List**. This list holds the suspect resources that we wish to watch more closely. The **Suspect Hot List** contains the following information about each suspect in its list:

- **Type:** The type of suspect ID. This will either be Talkgroup or Radio ID.
- **System:** The system ID of the suspect.
- **ID:** The ID of the suspect.
- **Alias:** Suspect ID alias.
- **# PTTs:** The number of push-to-talks that have been received by the ID (or on IDs in the group in the case of suspect groups) since the suspect was added to the **Suspect List**.
- **# Affiliations:** The number of affiliations that have been received by the ID (or by IDs in the group in the case of suspect groups) since the suspect was added to the **Suspect List**.
- **Distinct Groups:** The total number of groups that the suspect has issued or received activity on (always 1 in the case of suspect groups).
- **Total Airtime (sec.):** The total airtime (in seconds) that the suspect has issued activity for. For suspect groups this will include all radio IDs on the group.
- **Last Contact:** The last date and time the suspect reported activity.

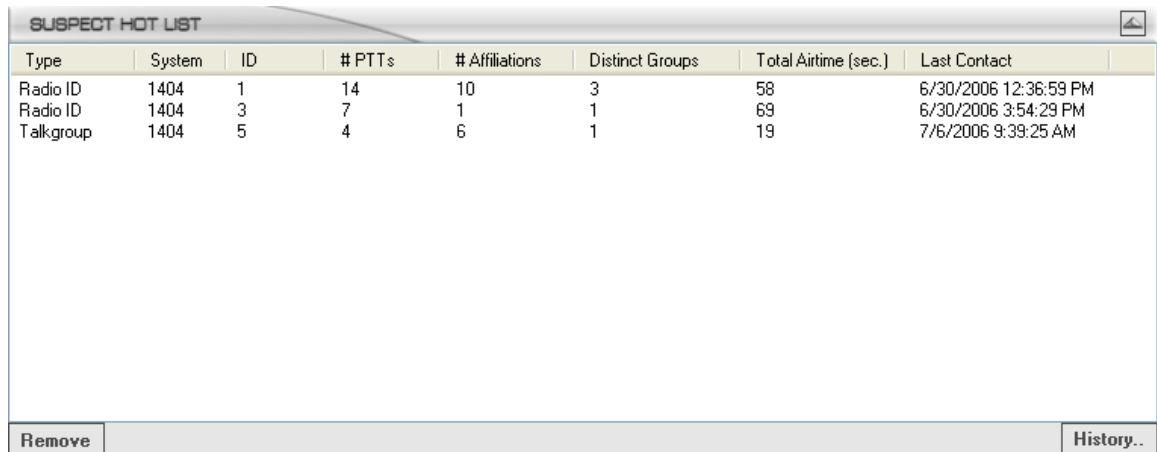

Type	System	ID	# PTTs	# Affiliations	Distinct Groups	Total Airtime (sec.)	Last Contact
Radio ID	1404	1	14	10	3	58	6/30/2006 12:36:59 PM
Radio ID	1404	3	7	1	1	69	6/30/2006 3:54:29 PM
Talkgroup	1404	5	4	6	1	19	7/6/2006 9:39:25 AM

Figure 3.4 – GW_CloneWatch Suspect Hot List

Suspect Hot List Options

Remove

The **Remove** button allows you to remove a suspect from the **Suspect Hot List**. The suspect will not be removed from the **Suspect List**. To remove a suspect from the **Suspect Hot List**, take the following steps:

1. Select the suspect that you wish to remove from the **Suspect Hot List**: You can select the suspect by clicking on it.
2. Click the **Remove** button: This will result in a confirmation dialog message box.
3. Click the **Yes** button: This will remove the suspect from the **Suspect Hot List**.



Once you remove a suspect from the **Suspect Hot List**, you may need to unselect the removed suspect in the **Suspect List** before the **Add to Hot List** option is available for the removed suspect.

History

GW_CloneWatch keeps detailed activity information for each suspect in the **Suspect List**, including all suspects in the **Suspect Hot List**. This information is called History. To view the history for a suspect in the **Suspect Hot List**, take the following steps:

1. Select the suspect for which you wish to view history: You can select the suspect by clicking on it.
2. Click the **History...** button: This will load the **Suspect History** window (shown above in Figure 3.3 above)
3. Click the **Close** button on the **Suspect History** window to return to the GW_CloneWatch GUI.

Print


1. Select the activity in the history list that you wish to print. Select a range by clicking on the first activity and holding Shift while clicking on the last activity in the desired range. If you wish to print all of the activity in the history list, skip this step.
2. Right-click on the **Suspect Hot List**: This will show the activity list options.
3. Click on the **Print ...** option: This will show the printer options screen specific to your default printer.
4. Select the options for your printer. It is usually best to choose to print in landscape mode (not portrait).
5. Click **OK** once you are satisfied with your printer options: This will result in a dialog asking if you want to print the selected items or all items.

Using the Suspect Exemption List

The **Suspect Exemption List** contains each suspect that has been marked as exempt.

You may want to mark a suspect as 'exempt' if the suspect exhibits behaviors that result in false suspicious activity. The **Suspect Exempt List** is accessed using the **Exempt** button on the GW_CloneWatch GUI. The **Suspect Exempt List** contains the following information about each exempt suspect in the list:

- **Type:** The type of suspect ID. This will either be Talkgroup or Radio ID.
- **ID:** The ID of the suspect.
- **Alias:** Suspect ID alias.
- **Last Site:** The last site on which the suspect reported activity.
- **Last TG:** The last Talkgroup on which the suspect reported activity.
- **Last Activity:** The last activity reported for the suspect.
- **Last Contact:** The last date and time the suspect reported activity.
- **Confidence Level:** Number indicating how sure GW_CloneWatch is that this is a suspect. The higher this number is, the more confident GW_CloneWatch is that this is a suspicious ID.

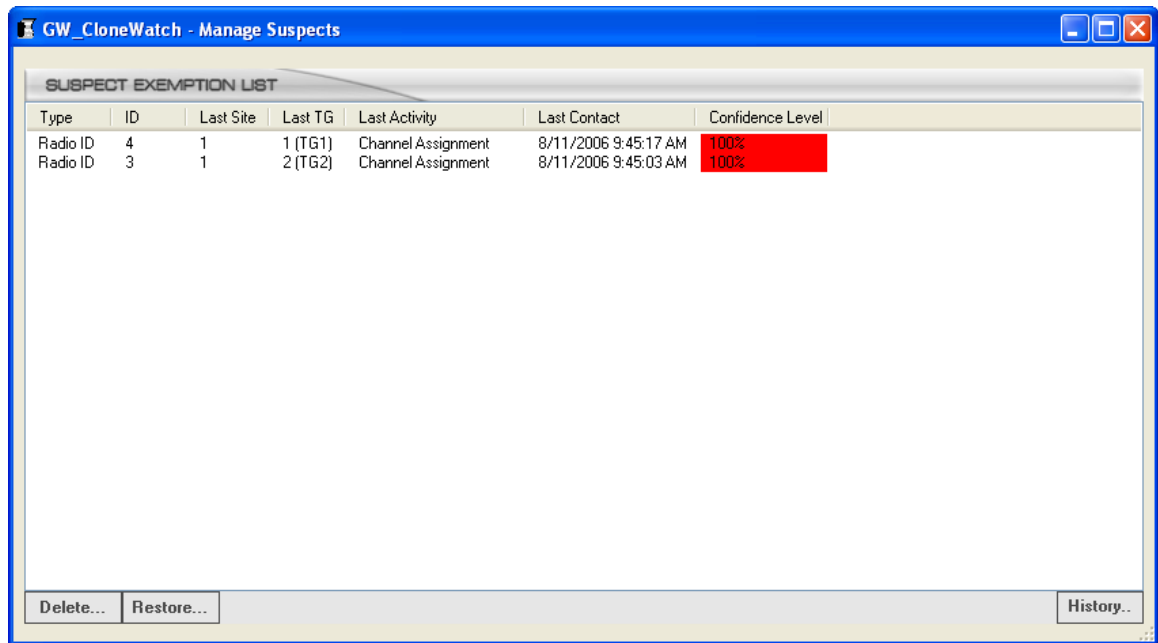

Type	ID	Last Site	Last TG	Last Activity	Last Contact	Confidence Level
Radio ID	4	1	1 (TG1)	Channel Assignment	8/11/2006 9:45:17 AM	100%
Radio ID	3	1	2 (TG2)	Channel Assignment	8/11/2006 9:45:03 AM	100%

Figure 3.5 – Suspect Exemption List Window



Once a suspect is exempted, GW_CloneWatch will stop storing detailed activity for the suspect.

Suspect Exemption List Options

Delete

The **Delete...** button allows you to delete a suspect from the **Suspect Exemption List**. You may wish to delete an exempt suspect that was manually added or a suspect that has not received activity in a while. To delete a suspect from the **Suspect Exemption List**, take the following steps:

1. Select the suspect that you wish to delete from the **Suspect Exemption List**: You can select the suspect by clicking on it.
2. Click the **Delete** button: This will result in a confirmation dialog box.
3. Click the **Yes** button to delete the suspect: This will remove the suspect from the **Suspect Exemption List** and delete any history related to the suspect.

Restore

The **Restore** button moves a suspect out of the exempt list and back into the main suspect list. To restore a suspect to the **Suspect List**, take the following steps:

1. Select the suspect that you wish to restore to the **Suspect List**: You can select the suspect by clicking on it.
2. Click the **Restore...** button: This will result in a confirmation dialog.
3. Confirm the move, by clicking the **Yes** button: This will move the suspect from the Exempt list back into the **Suspect List**.

History

Once a suspect is added to the **Suspect Exemption List**, existing radio activity information is retained, but additional activity will not be recorded. This information is called History. To view the history for a suspect in the **Suspect Exemption List**, take the following steps:

1. Select the suspect for which you wish to view history: You can select the suspect by clicking on it.
2. Click the **History...** button: This will load the *Suspect History* window (shown in Figure 3.3)
3. Press the **Close** button on the *Suspect History* window to return to the GW_CloneWatch screen.

Print

1. Select the activity in the history list that you wish to print. Select a range by clicking on the first activity and holding Shift while clicking on the last activity in the desired range. If you wish to print all of the activity in the history list, skip this step.
2. Right-click on the **Suspect Exemption List**: This will show the activity list options.
3. Click on the **Print ...** option: This will show the printer options screen specific to your default printer.
4. Select the options for your printer. It is usually best to choose to print in landscape mode (not portrait).
5. Click **OK** once you are satisfied with your printer options: This will result in a dialog asking if you want to print selected items or all items.

Changing GW_CloneWatch Settings

The *GW_CloneWatch - Settings* window allow you to customize the settings for call overlap and impossible driving distance (IDD) thresholds.

Overlap Threshold

This tab contains a single setting which is explained in detail on the screen.

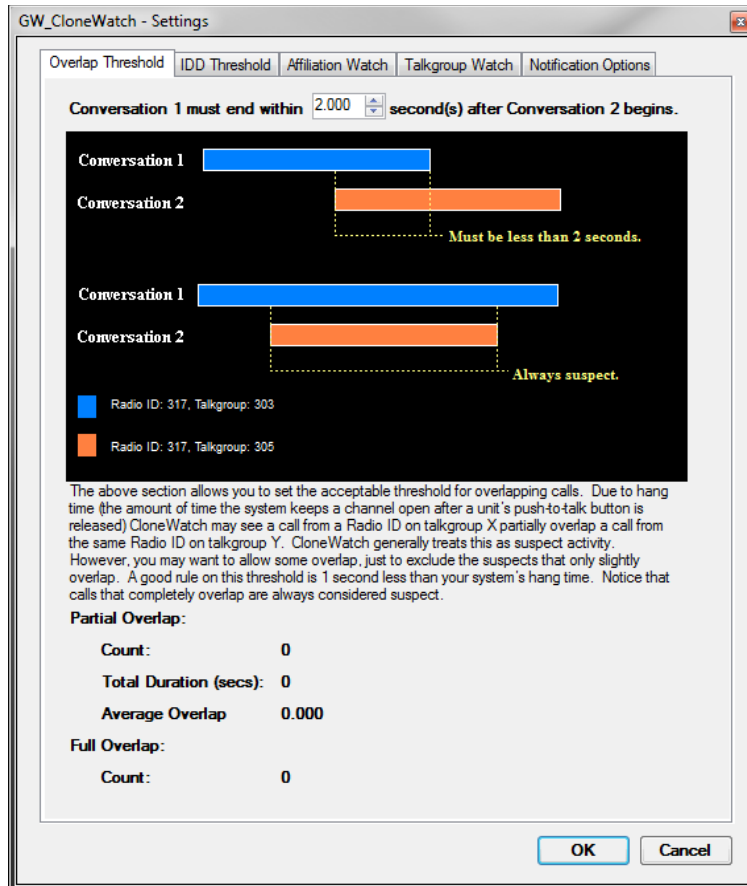


Figure 3.6 – GW_CloneWatch Settings – Overlap Threshold Tab

The Overlap Statistics section is provided to better help you gauge the ideal overlap threshold setting.



Multi-site data may not report overlapping calls in the same way as control channel data. If your GenWatch3 is receiving data from a multi-site data source, set your Overlap Threshold to 0.000 seconds. This will allow GW_CloneWatch to detect calls that begin and end at exactly the same time. For some multi-site configurations, this is the only way to detect partially overlapping calls.

Impossible Driving Distance (IDD) Threshold

This tab contains three values:

- Assumed driving speed (adjustable)
- Ignored IDD Suspect Threshold (adjustable)
- Average Broadcast Radius

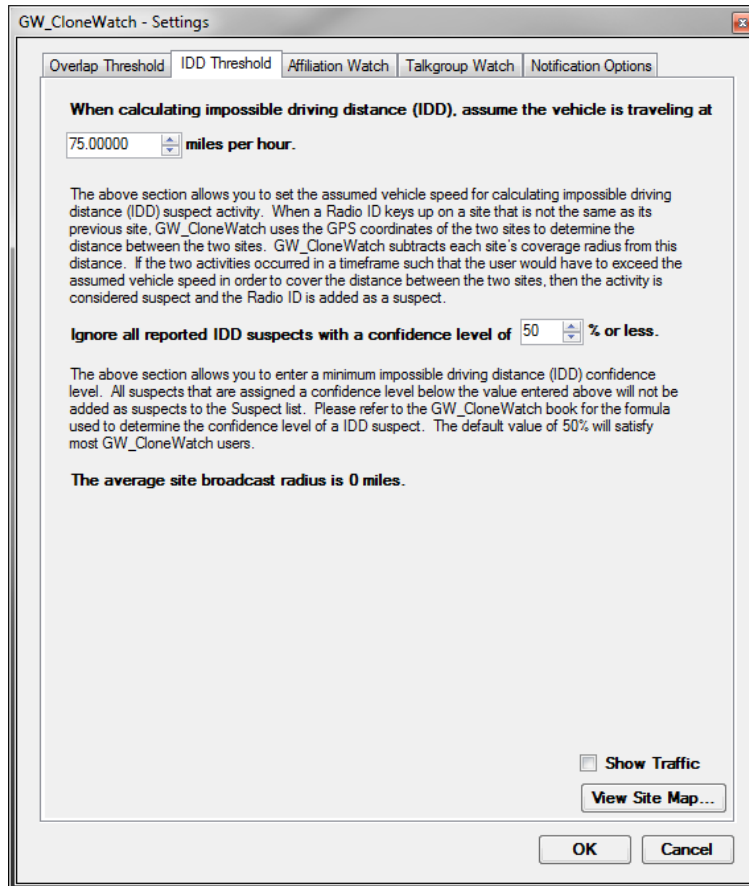


Figure 3.7 – GW_CloneWatch Settings – IDD Threshold Tab

Assumed Driving Speed

When GW_CloneWatch calculates an IDD, it uses this value as the maximum speed with which a radio ID could travel from point A to point B. If a radio ID keys up in such a way that it moved from point A to point B faster than the Assumed Driving Speed, the radio ID is considered a suspect.

Ignored IDD Suspect Threshold

This value allows you to ignore IDD suspects that are added with a low confidence level. You may wish to increase this value based on the quality of IDD suspects being reported by GW_CloneWatch. The logic used to derive IDD suspects is not exact, because GW_CloneWatch is not provided with the exact broadcast limitations of each site and because terrain is variable.

Average Broadcast Radius

This value indicates the average broadcast radius among all sites in all systems. This value is used in the IDD formula described below.

The IDD Formula

The IDD formula consists of two separate calculations:

- SMPH: Miles per hour required to cover the distance between two sites (minus the broadcast radiuses of the two sites) in the given amount of time
- SMID: Miles in the distance between two sites (minus the broadcast radiuses of the two sites).

Given the two sites:

- Site ID: 1
 - Coverage Radius: 16 miles
 - Latitude: 13
 - Longitude: 14
- Site ID: 2
 - Coverage Radius: 14 miles
 - Latitude: 13
 - Longitude: 14.5



Kilometers are converted to miles before being used in the IDD Formula.

The distance between these two sites is approximately 33.66 miles. If radio ID 301 issues a push-to-talk with a reported source site of 1 and 1 minute later issues a push-to-talk with a reported source site of 2, the radio ID traveled 3.66 miles in 1 minute (distance between the two sites – (each site’s coverage radius)) = (33.66 – (16 + 14)).

Covering 3.66 miles in 1 minute requires a speed of 219.6 mph.

GW_CloneWatch takes this speed and compares it with the assumed driving speed value above. In this example, we have 75 mph as the assumed driving speed. To determine the SMPH value, GW_CloneWatch subtracts the assumed driving speed from the actual speed and caps the value off at 100.

$$\begin{aligned} \text{SMPH} &= 219.6 \text{ mph} - 75 \text{ mph} = 144.6 \text{ mph (capped off at 100 mph} = 100 \text{ mph)} \\ \text{So SMPH} &= 100 \end{aligned}$$

Next, GW_CloneWatch calculates the SMID multiplier. This value decreases the confidence level, based on how small a distance was traveled. The SMID multiplier is derived by dividing the distance the radio ID traveled by the average broadcast radius (capped off at 100).

$$\text{SMID} = \text{distance} / \text{average site broadcast radius} = 3.66 / 15 = 0.244$$

The overall confidence level of this suspect activity = $SMPH * SMID = 100 * 0.244 = 24.4\%$

IDD Formula Conclusion

As demonstrated, the above value is not a very high confidence level; and rightfully so. If a human were looking at these values they would, most likely, come to the same conclusion. This looks like a case where sites 1 and 2 are adjacent sites. The coverage radii provided for these two sites are either slightly off (as expected in estimated values) or the radio ID found site 2 after topping a hill, etc. If the Ignored IDD Suspect Threshold is 25 or more, this suspect will not be added to the GW_CloneWatch Suspect List.

View Site Map

The **View Site Map** option shows a graphical representation of how your sites are geographically positioned, based on the Longitude, Latitude and Broadcast Radius values provided for each site in the GW_Alias screen. To view the *Site Map* window, follow the steps below:

1. Load the *Settings* screen by clicking on the **Settings** button.
2. Click on the IDD Threshold tab.
3. Click on the **View Site Map** button: This will load the *Site Map* window.

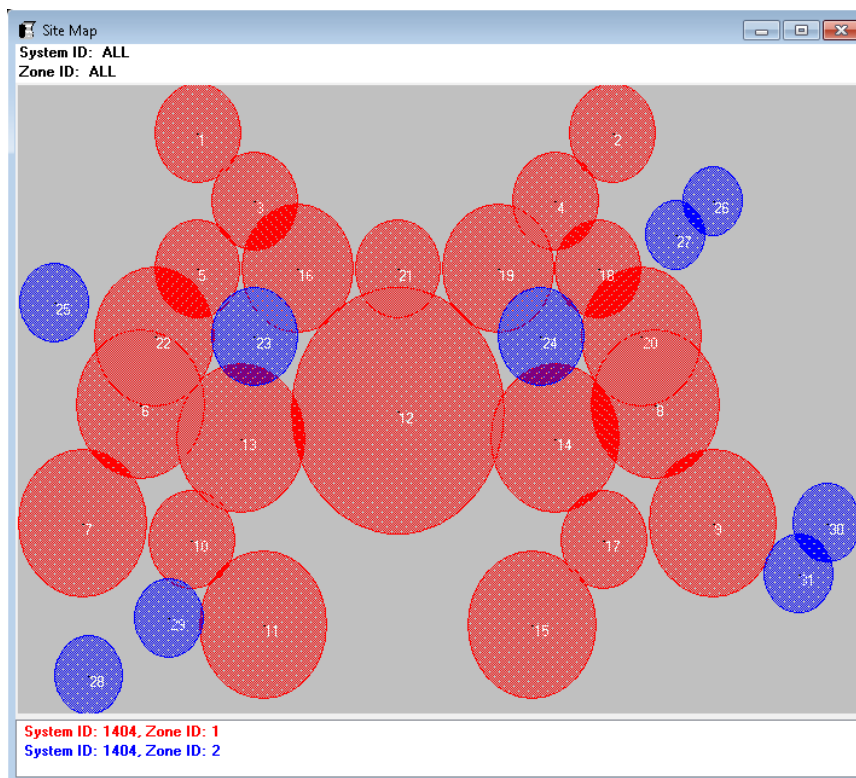


Figure 3.8 – Site Map Window

Affiliation Watch

This tab allows you to define how you expect radios to affiliate on your system.

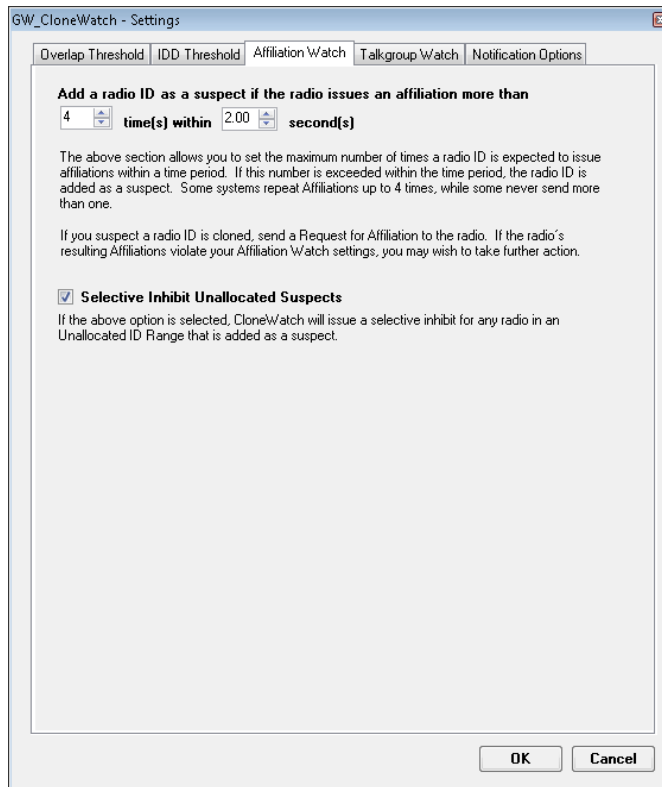


Figure 3.9 – GW_CloneWatch Settings – Affiliation Watch Tab

If a single radio affiliates more often than the **time(s)** value within the **second(s)** value, the radio ID will be added as a 75% confidence level suspect. If you do not wish to use this feature, set the **time(s)** value to 99, the highest possible value.

Talkgroup Watch

When you setup a talkgroup range in GW_CloneWatch, you will get GUI notifications of any suspect activity on that range. That alert allows you to manually follow up to decide the appropriate actions to take.

In some circumstances, however, when a talkgroup is added to the **Suspect List**, you will also want to add any radio using that talkgroup to the **Suspect List**. Checking the box labeled **Add radio IDs on suspect talkgroups to Suspect List** will automatically add radio IDs to the **Suspect List** if they generate activity on a talkgroup that breaks the rules defined for that talkgroup.

Usage examples:

- **Cut off a specific talkgroup:** Imagine you have a customer on your system that uses 30 radios operating on talkgroup 16. If you wish to cut off the customer's access to your system without manually inhibiting every radio, create a talkgroup ID range of 16-16 and set its validity level to Unallocated. If the Talkgroup Watch and Automatic Inhibit options are checked, each radio will be inhibited automatically after it generates activity.
- **Prevent unauthorized talkgroups from using the system:** If authorized users on your system should be using talkgroups 1-10, create a talkgroup range from 11 to the maximum ID range on your system. If the Talkgroup Watch and Automatic Inhibit options are checked, any radio will be inhibited automatically after it generates activity on an invalid talkgroup.

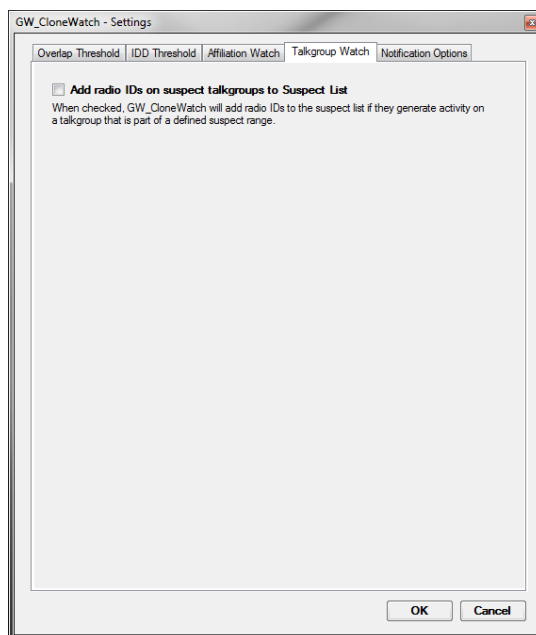


Figure 3.10 – GW_CloneWatch Settings – Talkgroup Watch Tab

Notification Options

This screen allows you to choose which suspect reasons result in a GUI notification (see *Suspect Notifications* below) of a new suspect.

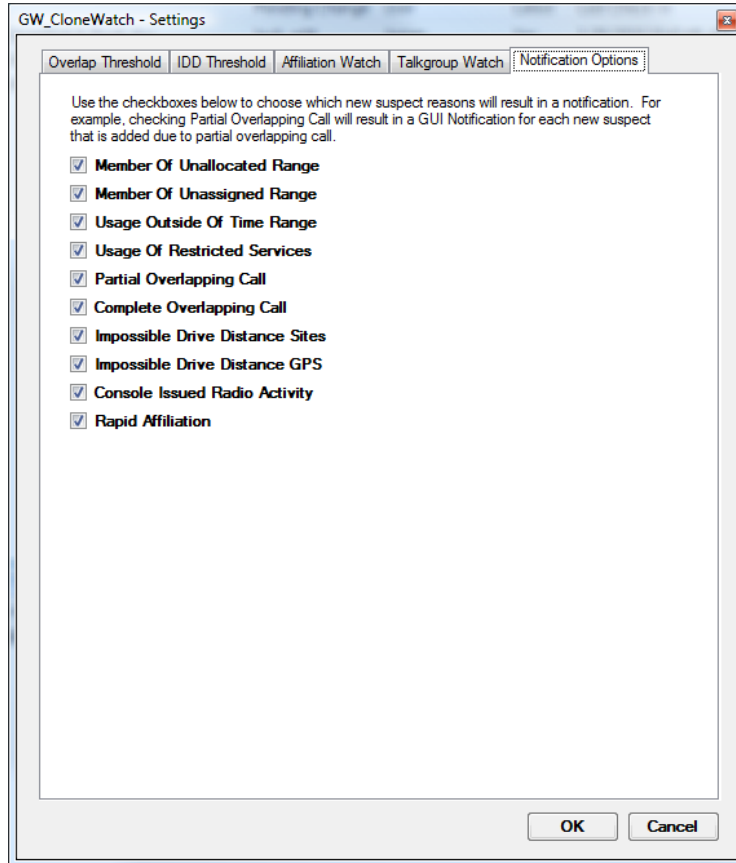


Figure 3.11 – GW_CloneWatch Settings – Notification Options Tab

Each checkbox on this screen represents a reason why GW_CloneWatch adds a suspect to the **Suspect List**. If you do not wish to receive a GUI notification when a suspect is added for a particular reason, uncheck that reason.

Suspect Notifications

When GW_CloneWatch adds a new suspect to the **Suspect List**, it also sends out a GenWatch3 GUI Notification. These are the same notifications discussed in *Chapter 10 GenWatch3 Notifications* of the GenWatch3 Core Manual.

For each new suspect, GW_Alerts shows a GenWatch3 Notification window. This window's *Desc.* column shows:

- **Suspect Type:** Talkgroup or Radio ID.
- **Level:** Percent confidence level that this activity is unwanted activity.
- **Reason:** Why the activity is considered suspect.

These notifications are only shown to GenWatch3 users with an **Administrator** role. GenWatch3 users with a role other than **Administrator** will not receive the notification.

The GenWatch3 GUI Notification is accompanied by a sound of breaking glass (to denote breaking and entering). This sound file is named *NewSuspect.wav* and is located in the installation directory of GenWatch3 (by default *C:\Program Files\Genesis\GenWatch3*). GenWatch3 ships with two additional sound files:

- *NewSuspect2.wav:* Longer version of the breaking glass sound
- *NewSuspect3.wav:* Creaking door

To change the new suspect notification sound to one of the other sound files, follow the steps below:

1. Browse to the GenWatch3 installation directory.
2. Right-click on the *NewSuspect.wav* file: This will show the file options menu.
3. Choose **Rename** from the file options window.
4. Rename the file *NewSuspect.wav* to *NewSuspect1.wav*.
5. Right-click on the file that you wish to use as the new suspect sound file: This will show the file options menu.
6. Choose **Rename** from the file options window.
7. Rename the file to *NewSuspect.wav*.



You are not limited to replacing the *NewSuspect.wav* file with the ones provided in the GenWatch3 installation. If you have a wav file you would prefer to hear for suspects, follow the steps above to rename your file to *NewSuspect.wav*.